

## T e s t R e p o r t

**Report No** : L18489  
**Client:** : Dannells  
Unit 13 Abbey Mead Industrial Park  
Booker Road  
Waltham Abbey  
Essex  
EN9 1HU  
**Description** : Diffuser Sample (A1-A5)  
**Manufacturer** : Not Disclosed  
**Type/Model** : Not Disclosed  
**Test Specification** : BS EN 60598-1:2008 650°C Glow wire test (Clause 13.3.2) only  
**Date of Testing** : 05/07/2019  
**Conclusion** : On the basis of the tests undertaken, the submitted sample is considered to comply with the requirements of the above specification.  
**Date of Issue** : 18/07/2019  
**Date of Expiry** : 17/07/2024

**Tested by:** K. KISZYCKA  
**Position:** Laboratory Technician



**Approved by:** M. LLOYD  
**Position:** Technical Lead –  
Product Safety



1286

## **INTRODUCTION**

Dannells have supplied the product identified in Table 1. for Glow wire flammability testing in accordance with the specification detailed on page one of this report.

## **PRODUCT DETAILS**

**Table 1. Test Sample Details**

Product Description	Diffuser Sample (A1-A5)
Model No.	Not Disclosed
Number of Samples	One
Date of Receipt	20/06/2019
Condition on Receipt	Good
Classification	Suitable for mounting on normally flammable surfaces – Normal Use
Lamp Type and Power	220-240V 50/60Hz
Product Dimensions	
Length:	400mm
Width/ Ø:	400mm
Height:	288mm
Sampling Method: Test samples selected and supplied by client, no sampling method specified by client.	

**Continued on following page**

## **RESULTS**

<b><u>CLAUSE</u></b>	<b><u>CLAUSE TITLE AND RESULTS</u></b>
----------------------	--

13.3.2	<u>650°C Glow Wire Test</u>
--------	-----------------------------

When subjected to the Glow Wire Test at 650°C, the sample did not ignite. No drop occurred to the tissue paper situated beneath the test sample.

The requirement of the Standard is that the duration of any burning shall not exceed 30 seconds after removal of the Glow wire and any burning drop from the sample shall not ignite the underlying parts of tissue paper spread out horizontally 200mm below the sample.

**The sample is therefore deemed to comply with the requirements for the 650°C Glow Wire Test**

**NO OTHER TESTS WERE PERFORMED ON THE SAMPLE.**

---

Continued on following page

**DEVIATION(S) FROM TEST STANDARD**

No reported deviations from test standard.

**ILLUSTRATION**

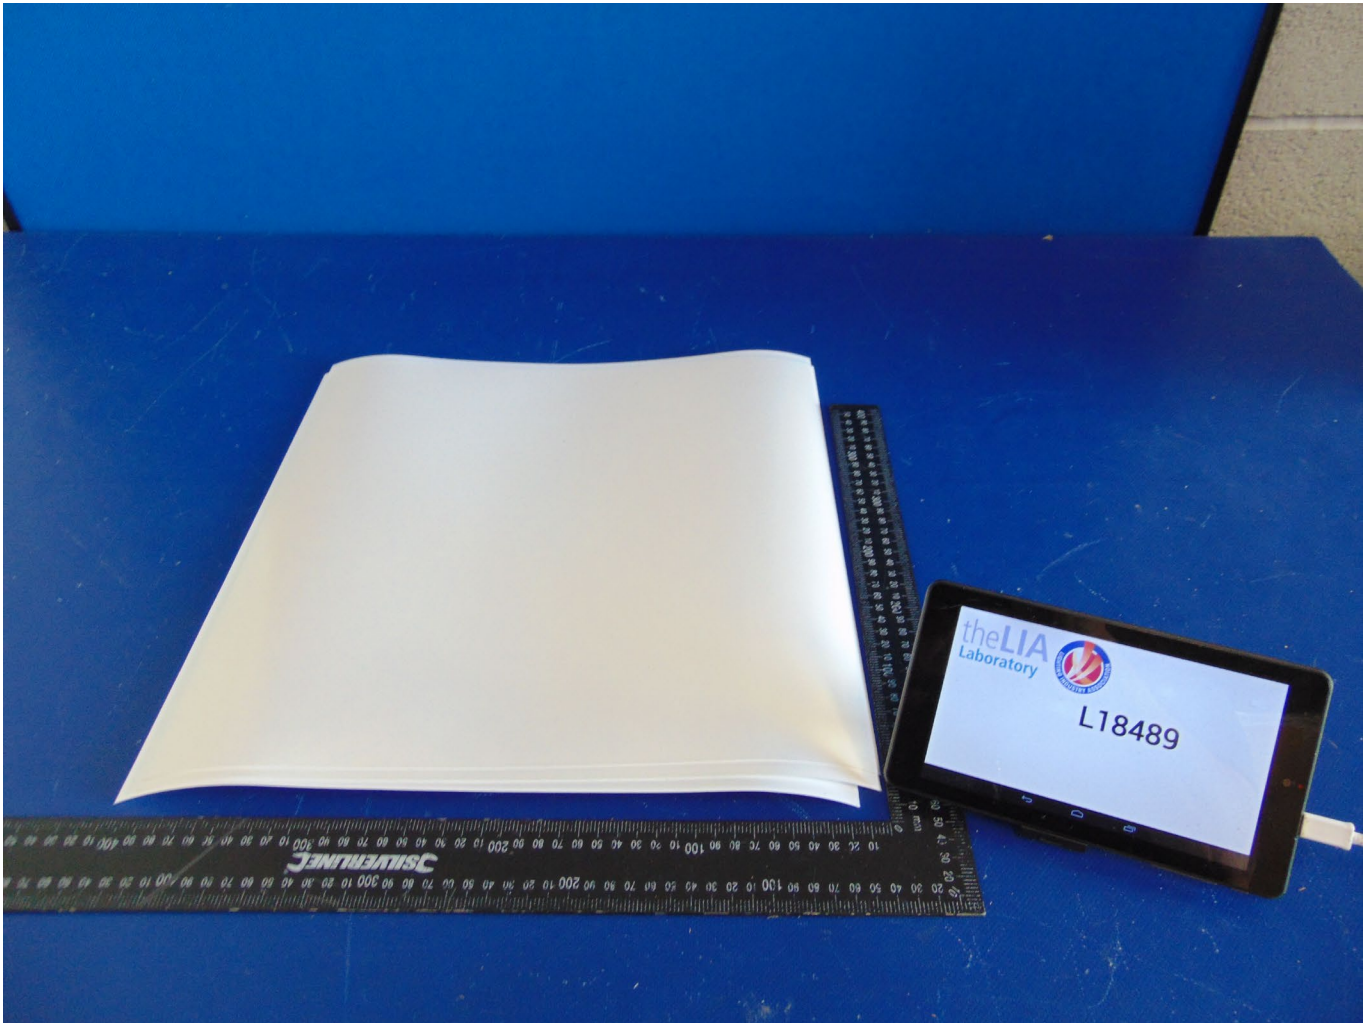


Figure 1. *Product image*

---

End